



Knowledge Base

powered by  **ALARM.COM**

Stream Video Recorder (ADC-SVR210) - Installation Guide

 English

English





In the box

- ADC-SVR210
- Power adapter
- Ethernet cable
- QR card with code that links to this digital installation guide

Pre-installation checklist

- Stream Video Recorder (ADC-SVR210)
- AC power adapter (DSA-42PFH-12L FCA 120350)
- An Ethernet cable
- A display with an HDMI input (optional)
- An HDMI cable (optional)

- USB keyboard and mouse
- Ethernet connection to broadband (Cable, DSL, or Fiber Optic)
- Login and password for the customer account to which you will add the ADC-SVR210


Important: The customer account must have an ADC-SVR210 compatible service package, and an ADC-SVR210 supported camera.

Optional accessories


- Alarm.com SVR210 Shelf (ADC-VACC-SVR210-MNT); White aluminum shelf with dimensions: 10" x 5.9" x 1.5" - For more information, see [Alarm.com SVR210 Shelf \(ADC-VACC-SVR210-MNT\)](#)

Overview

1. Status LED
2. Video Export USB 3.0 port
3. Keyboard/Mouse USB 2.0 port
4. HDMI port
5. Camera RJ45 port
6. Uplink RJ45 port
7. Reset button
8. DC 12V port input

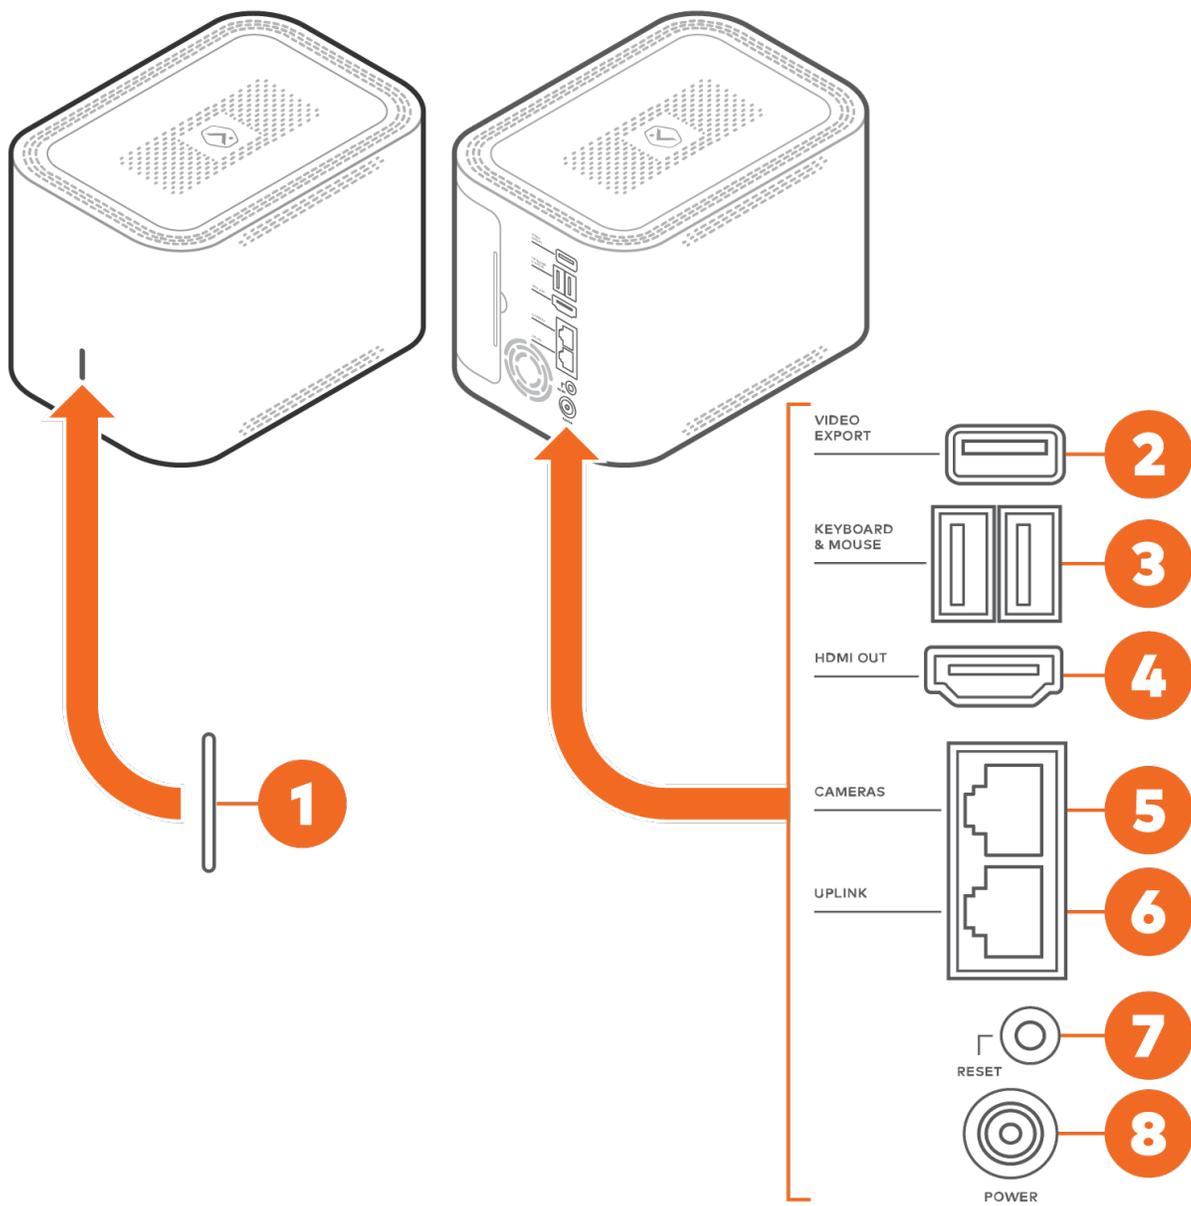

Recommended networking diagram for SVR210

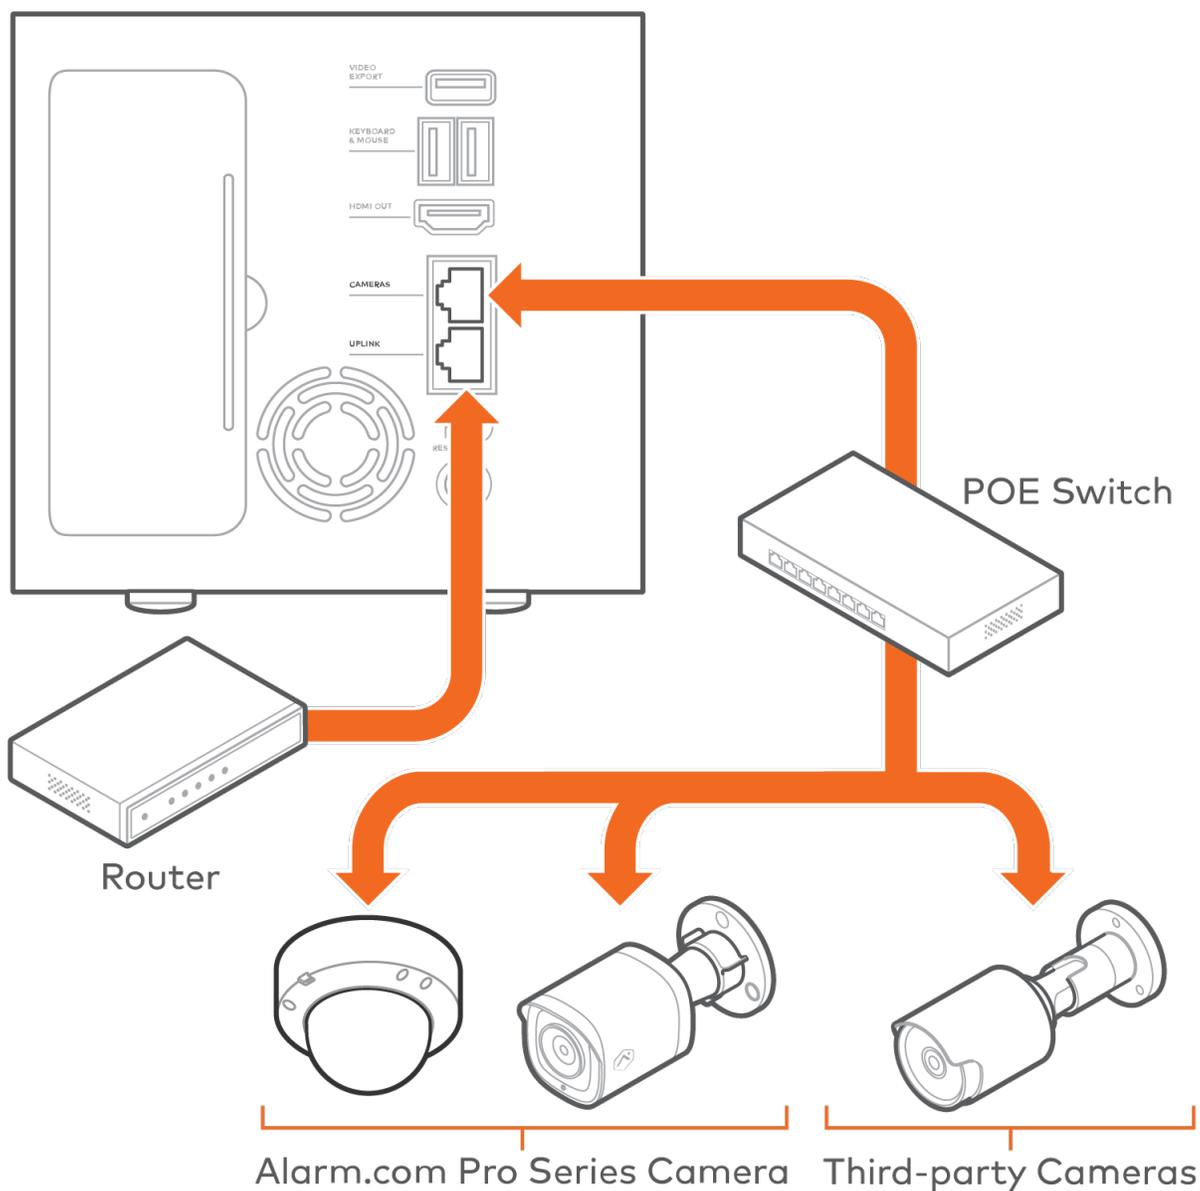

Connect the ADC-SVR210 to a local network

The ADC-SVR210 must first connect to the customer's local network before it can be added to a customer account.

1. Using an Ethernet cable, connect SVR210's uplink port to the network router.
2. Connect the device's AC power adapter and plug it into a non-switched, grounded power outlet.
3. Wait for the device to boot up. A solid green status LED indicates that the device is ready to be added to the account.

Once the ADC-SVR210 is connected to the customer's network and displays a solid green LED, add the ADC-SVR210 to the customer account.