



RE101 GE-Compatible Standard Door / Window

Features

- For sensing things that open or separate.
- Magnet and Internal reed switch operation.
- 2 supplemental hardwire zones.
 - o GE-compatible version reports 2nd zone to 2nd ID.
- · Cover tamper.
- Strong, reliable RF signal.
- 10-15 year battery life on CR123A battery.
- Low Battery indication.

Key Instructions

- Battery "+" faces towards spring.
- No end-of-line resistors on hardwire zones.
- Panels assume hardwire zone alarm is state in which contact was enrolled.
 - · Center hardwire terminal is common.
 - Reed switch and terminal closest to (outer) it are 1st ID
 - Inner terminal is 2nd ID.
 - Enrolling:
 - 1st ID: Reed switch and outer terminal zone are enrolled by tamper switch.
 - 2nd ID: Inner terminal zone is enrolled by holding down tamper while installing battery.

Operation

Magnetic and 1st (outer) hardwire zone (1st ID)

Alarm, when...

... magnet is pulled away from reed switch.

... contact changes to alarm.

Tamper, when cover is opened.

Supervisories, every hour.

• 2nd (inner) hardwire zone (2nd ID)

Alarm: when contact changes to alarm condition.

Tamper: none.

Supervisory: every hour.

RE101 GE-Compat DWS Instructions

Page 1 of 3

12-May-14

24-Hour Tech Support Line: (715)808-0164

www.ResolutionProducts.com

Specifications


1 inch nominal Magnet trip distance: Mounting hardware: # 4 or #6 screws Replacement Battery: CR123A 1550mAH 0F to 120F

Temperature Range:

Housing dimensions: 3.3x1.4x1.1 inches

Specifications subject to change without notice.

Internal Picture

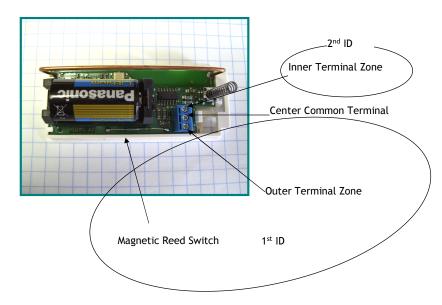

RE101 GE-Compat DWS Instructions

Page 2 of 3

12-May-14

24-Hour Tech Support Line: (715)808-0164 www.ResolutionProducts.com

Notices

"GE", "Honeywell", and "DSC" are trademarks owned by General Electric Company, Honeywell International Inc., and Tyco Safety Products Canada LTD, respectively.

Resolution Products, Inc. products will function with one of either GE, DSC or Honeywell systems. However, no Resolution product is produced by, endorsed by, nor is officially associated with GE, Honeywell or DSC. Resolution recommends verifying proper enrollment and operation, per control panel installation instructions, at installation.

Warranty

Resolution Products, Inc. will replace products that are defective in their first five (5) years.

FCC Notice

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions:

This device may not cause harmful interference.

This device must accept any interference that may be received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the Resolution Products, Inc. could void the user's authority to operate this equipment.

FCC ID: U5X-RE101X

IC Notice

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions:

(1)This device may not cause interference, and

(2)This device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

(1) l'appareil ne doit pas produire de brouillage, et

(2)l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

IC: 8310A-RE101

RE101_GE-Compat_DWS_Instructions

Page 3 of 3

12-May-14

24-Hour Tech Support Line: (715)808-0164 www.ResolutionProducts.com